

WO 2004/054706

3/PRTS

10/539045

PCT/SE2003/001996

1

JC17 Rec'd PCT/PTO 15 JUN 2005

TITLE

**VESSEL FOR PERFORMING MICROWAVE-ASSISTED
CHEMISTRY ON SMALL VOLUMES OF REAGENTS.**

FIELD OF THE INVENTION

The present invention relates to a vial assembly, and more specifically to a sealed micro vial assembly for performing microwave-assisted chemical reactions on small reaction mixture volumes. The invention also refers to a system for performing microwave-assisted chemical reactions on small reaction mixture volumes contained in the micro vial assembly, and to the use of the micro vial assembly and system for performing microwave-assisted organic synthesis reactions.

BACKGROUND AND PRIOR ART

The expression "microwave-assisted chemical reactions" as used herein refers to processes utilizing microwaves to initiate or accelerate chemical reactions. Microwave-assisted chemistry is used for heating materials in a variety of chemical processes, the microwaves interacting directly with the materials including water and a number of organic liquids to cause molecular action and generate heat. Accordingly, microwave-assisted techniques have been developed both for analytic and synthetic processes. The equipment used for performing microwave-assisted chemistry conventionally includes an apparatus having a cavity into which microwaves are guided from a microwave source, typically a magnetron. A vessel, containing the reactants, is introduced in the cavity and positioned for exposure to the microwaves. In some appliances, the vessel is a sealed container in which a reaction can proceed under conditions of both elevated temperature and elevated pressure. The vessel, and the apparatus for exposing the reaction mixture in the vessel to microwaves, provide the basic components in a system for performing microwave-assisted chemical reactions. In commercial practice, the system additionally comprises means for vessel transport to and from the cavity, means for dispensing solvent and reactants to the vessel, detection means, power and control means, and a rack for parking the vessel outside the cavity.

A commercially available reaction vessel in a system for performing microwave-assisted chemical reactions is diagrammatically shown in Figure 1 of the drawings, attached hereto. This known reaction vessel comprises the well known shape of a

BEST AVAILABLE COPY

WO 2004/054706

PCT/SE2003/001996

2

test tube, having a penetrable septum capped over the open end of the tube. The tube diameter is dimensioned to fit with other components of the system such as the cavity entrance, gripper means and a parking rack. The vessel has a reaction chamber dimensioned for containment of reaction mixture volumes commonly processed in the system.

In this context, the expression "small reaction mixture volumes" refers to reaction mixture volumes in a micro liter range, such as volumes down to 500 μl or less, for example 1-500 μl , preferably 100-500 μl . Specific problems need to be addressed when designing a reaction vessel for performing microwave-assisted chemistry on small volumes contained in the vessel. For example, the geometry in a top portion of the vessel should be designed to facilitate reflux/re-flow of fluid; the inner diameter of the vessel should be large enough to avoid formation of meniscus of fluid that would be unable to flow back from the top of the vessel; the container volume that is not occupied by the reaction mixture, or head space, should be related to the volume of reactants to avoid exaggerated vaporization at operative pressures and temperatures; in spite of reduced containment dimensions, the vessel exterior must match the cavity entrance diameter and the transporting gripper means, as well as parking racks, and the vessel must be able to position the reaction mixture for dispensing of reactants and/or solvents, for microwave exposure, and for detection.

The present invention aims to solve these and other problems encountered when performing microwave-assisted chemical reactions on small volumes.

A first object of the invention is therefore to provide a micro vial assembly that allows microwave-assisted chemistry to be performed on small volumes.

Another object is to provide a micro vial assembly for performing microwave-assisted chemistry on small volumes, adapted for cooperation with external equipment designed for microwave-assisted chemistry on a larger scale.

Still another object is to provide a micro vial assembly for performing microwave-assisted chemistry on small volumes, designed to ensure comparative temperature and pressure detection results.

WO 2004/054706

PCT/SE2003/001996

3

Yet another object is to provide a system that allows microwave-assisted chemistry to be performed on small volumes by incorporating the micro vial assembly of the invention.

These and other objects and aims are met in a micro vial assembly and a system according to the appended claims.

SUMMARY OF THE INVENTION

Briefly, the present invention provides a micro vial assembly for performing microwave-assisted chemical reactions on small volumes, wherein a reaction vessel is sealed by means of a sealing diaphragm that is capped over an open end of the reaction vessel. The reaction vessel mouths in an end plane of a sleeve surrounding the reaction vessel, the diaphragm being clamped to the end plane through a cap engaging an outer boundary of the sleeve. The sleeve provides a radial extension of the reaction vessel in order to bridge the radial distance between a wall of the reaction vessel and other components in a system for performing microwave-assisted chemical reactions.

BRIEF DESCRIPTION OF THE DRAWINGS

The micro vial assembly and system are further described below with reference to the attached drawings. In the drawings,

Fig. 1 is a diagrammatic representation of a system for performing microwave-assisted chemical reactions, and a prior art reaction vessel adapted to the system;

Fig. 2 shows an embodiment of the new micro vial assembly in an exploded perspective view;

Fig. 3 is a longitudinal section through the micro vial assembly according to one embodiment of the present invention;

Fig. 4 is a longitudinal section through a sleeve of a preferred embodiment, and

Fig. 5 is an enlarged partial section showing the upper end of the new micro vial assembly.

WO 2004/054706

PCT/SE2003/001996

4

DETAILED DESCRIPTION OF THE DRAWINGS

The present invention will be more fully described below, modifications thereto successively outlined as the disclosure proceeds.

With reference to Fig 1, a system for performing microwave-assisted chemical reactions typically comprises an apparatus formed with a cavity 1, here shown with a prior art reaction vessel 2 being inserted and vertically positioned for exposure to microwaves from a microwave source (not shown). In the inserted position, the reaction vessel 2 is located within the operative detection area of a detecting means, such as an infrared light (IR) sensor 3. The reaction vessel 2 has an outer diameter adapted to a diameter D of an entrance to the cavity. The entrance is here represented by an insertion guide 4, determining the diameter D through its inner radius. Though not shown in the drawing, a gripper means for vessel transport to and from the cavity, as well as a rack for parking the vessel outside the cavity are likewise engineered to operate with the diameter D.

Fig. 2 illustrates an embodiment of the new micro vial assembly for performing microwave-assisted chemical reactions on small volumes in a system substantially as mentioned above. The assembly according to the invention comprises a reaction vessel 10, a sleeve member 20, a sealing diaphragm 30 and a cap member 40 as its main components.

The reaction vessel 10 has an open upper end and a closed bottom end, and an inner volume 11 (Fig. 3) forming a reaction chamber which is designed in respect of the small volumes to be contained therein for chemical reactions initiated or accelerated by microwaves. In most cases the reaction vessel 10 preferably is a circular cylinder, however, other cylinders having rounded or polygonal sections may likewise be applied to take advantage of the invention disclosed herein. Accordingly, an inner diameter d of reaction vessel 10 is dimensioned to permit effective microwave absorption by the reactants and solvents in the vessel, and to avoid formation of meniscus of fluid that would stick to the wall of reaction vessel 10 and be hindered to flow back from the top of the vessel. As a non-limiting example, the reaction vessel 10 may have an inner diameter d in the range of a few millimeters, such as 3-5 mm, or as preferred not less than 3.5 mm.

WO 2004/054706

PCT/SE2003/001996

5

The volume that is not occupied by solvent and reactants contained in the reaction vessel 10, i.e. the headspace volume of reaction vessel 10, is dimensioned in relation to the smallest reaction mixture volume to be handled in order to avoid exaggerated vaporization at operative pressures and temperatures. As a guidance, the head space volume preferably should be less than 20 times the smallest volume processed in the reaction vessel 10. The bottom of reaction vessel 10 may have any preferred shape such as flat, conical, rounded, etc. The axial length l of the inner cavity of reaction vessel 10 may be determined through a radial compression 12, forming a closed end above the terminal end 13 of the reaction vessel as illustrated in Figs. 2 and 3 in order to position the reagents contained therein for energy exposure and detection.

The geometry in the upper end of reaction vessel 10 is determined in order to facilitate reflux of liquid and to minimize the risk of solvent and/or reaction mixture sticking to the inner surface of the reaction vessel. Most preferred, the top portion of reaction vessel 10 is formed with increasing radius towards the open end, forming a widening mouth 14. For example, the mouth 14 may be conical or may alternatively have a progressively increasing radius forming a flared cone (not shown) in the upper end of reaction vessel 10. In all alternatives, the inner wall of reaction vessel 10 connects to the mouth of increased radius through a continuous transition region 15. The mouth 14 has a flange or rim 16, defining the opening in the upper end of reaction vessel 10 and contemplated for a sealed engagement with the diaphragm 30 as will be further discussed below with reference to Fig. 5.

The sleeve member 20 is a cylinder having a through hole and an outer perimeter corresponding to the diameter D , running from an upper end plane 21 towards a bottom end 22, the bottom end being chamfered or formed with a radius 23.

In a preferred embodiment, see Fig. 4, the upper end of the sleeve is formed circumferentially for engagement with a cap as explained below, the sleeve having a first diameter portion D_1 running from the upper end to meet a reduced diameter portion D_2 in a lower end of the sleeve. The portion of reduced diameter D_2 preferably is shaped as a truncated cone, and facilitates the insertion of the micro vial assembly into a parking rack or into the microwave cavity of the system, etc.

WO 2004/054706

PCT/SE2003/001996

6

A recess is formed in the end plane of the sleeve, providing a seat 24 that is correspondingly shaped to receive and support the top portion of increased radius of reaction vessel 10. In the supported position, the reaction vessel 10 extends axially through the sleeve 20, the sleeve providing a radial extension of the reaction vessel in concentric relation about the vessel to bridge the radial distance between the wall of reaction vessel 10 and the operative diameter D of the system.

The axial length of the sleeve 20 is determined with respect to conditions set by the system, such as the structure of parking racks, gripper means, and microwave cavity specifications. Typically, the sleeve terminates above the portion of reaction vessel 10 that is exposed to microwaves and detection.

The upper end of the sleeve 20 is formed with a thread, a groove or other formation, such as a flange 25, for engagement with and for securing the cap member 40 to the sleeve 20.

The cap 40 is formed with a through hole 41 that is positioned to match the mouth 14 of reaction vessel 10 in the assembled relation. The cap advantageously is a metal element that is secured about the perimeter of the sleeve 20, reaching over the outer boundary of the end plane 21. In the illustrated embodiment, the cap 40 is crimped for a firm engagement with the lower side of the flange 25. Alternatively, a modified cap may be secured to the sleeve by a threaded engagement, or by gluing, e.g.

The sealing diaphragm 30 is clamped between the cap 40 and the end plane 21 of the sleeve 20 in the sealed micro vial assembly. In the clamped position, the diaphragm 30 covers the mouth 14 of reaction vessel 10 and extends in radial direction outwardly of the rim 16. The diaphragm 30 preferably has a radius corresponding to that of the end plane 21. The rim 16, protruding slightly above the end plane 21 when the reaction vessel 10 is accommodated in the sleeve 20 as illustrated in Fig. 3 and 5, is thus depressed in the lower side of the diaphragm for a sealed enclosure of the inner volume 11 of reaction vessel 10. The diaphragm 30 is an elastic element, preferably having self-sealing properties in order to allow penetration by a dispensing means, such as a needle. Suitable materials for a sealing diaphragm are well known within the art and need not be further commented here. Naturally, the diaphragm 30 may have a thickness of approximately one or a few millimeters, e.g.,

WO 2004/054706

PCT/SE2003/001996

7

and is compressible so that the rim 16 may be depressed in the lower side of the diaphragm.

Reaction vessel 10 is microwave transparent and made for example of glass. The sleeve 20 may be produced from any suitable material, such as a synthetic material, or metal, or glass. Preferably, the sleeve is made of a microwave-transparent material, such as a polymer material.

In the present invention, the reaction vessel 10 and sleeve 20 are separate elements fixedly secured by the cap 40 and diaphragm 30 as is more closely illustrated in Fig. 5. The diaphragm, clamped by the cap to accommodate the rim 16 and sealing the open end of the vessel, firmly locates the upper end of the vessel in the end plane of the sleeve.

As is apparent from Fig. 5, the rim 16 has an inner wall or inner perimeter that extends transversely to the diaphragm 30. This measure is conceived to provide a constant load area in the lower side of the diaphragm that is exposed to pressures generated from a reaction in the vessel, and to ensure comparative pressure detection results. The inner perimeter of the rim 16 defines a portion of the vessel cavity having a first radius r_1 . The first radius portion meets a second portion of the vessel cavity having a reducing radius r_2 , the reducing radius portion smoothly transforming into a portion of continuous radius r_3 defining a reaction chamber of the vessel cavity 11. The seat 24 of the sleeve is shaped in order to closely match and support the portion of reducing radius r_2 .

The above description teaches the elementary features of the new micro vial assembly, the scope of which is defined by the accompanying claims.

WO 2004/054706

PCT/SE2003/001996

8

CLAIMS

1. A micro vial assembly for performing microwave-assisted chemical reactions on small volumes, the assembly comprising:
 - a micro-wave transparent reaction vessel (10) having an open upper end and a closed bottom end;
 - a sleeve (20) having a through hole, and an upper end supporting the upper end of the vessel;
 - a cap (40) having a through hole, and
 - a sealing diaphragm (30),whereby the cap is secured to the sleeve and clamping the diaphragm for sealing the open end of the vessel when the vessel is supported in the sleeve, the cap and diaphragm thus securing the sleeve about the vessel and the vessel extending axially through the sleeve.
2. The micro vial assembly of claim 1, wherein the upper end of the sleeve is formed circumferentially for engagement with the cap, the sleeve having a first diameter portion (D_1) running from the upper end to meet a reduced diameter portion (D_2) in the lower end of the sleeve.
3. The micro vial assembly of claim 2, wherein the portion of reduced diameter in the lower end of the sleeve is a truncated cone.
4. The micro vial assembly of any previous claim, wherein the upper end of the vessel (10) is formed with a widening portion (14,15,16) and the upper end of the sleeve (20) is formed with an end plane (21), a recess in the end plane of the sleeve (20) providing a seat (24) for receiving the widening portion of the vessel.
5. The micro vial assembly of claim 4, wherein the widening portion of the vessel (10) and the seat (24) in the end plane of the sleeve (20) are both conical in shape.
6. The micro vial assembly of any previous claim, wherein the open end of the vessel (10) is defined by a rim (16) protruding above the upper end of the sleeve (20) when the vessel is supported in the sleeve, the rim being dimensioned to be depressed in the lower side of the diaphragm (30).

WO 2004/054706

PCT/SE2003/001996

9

7. The micro vial assembly of claim 6, wherein the rim (16) has an inner perimeter extending transversely to the diaphragm (30), sealing the open end of the vessel.
8. The micro vial assembly of claim 7, wherein the inner perimeter of the rim (16) defines a portion of the vessel cavity having a first radius r_1 , said first radius portion meeting a second portion of reducing radius r_2 , the reducing radius portion smoothly transforming into a portion of continuous radius r_2 defining a reaction chamber of the vessel cavity.
9. The micro vial assembly of any previous claim, wherein a bottom of the vessel (10) is formed through a radial compression (12) of the vessel, located above the terminal end (13) of the vessel.
10. The micro vial assembly of any previous claim, wherein the vessel (10) has an inner volume including a head-space volume which is less than 20 times that of the smallest reaction mixture volume contained in the vessel.
11. The micro vial assembly of any previous claim, wherein the vessel (10) is dimensioned for performing microwave-assisted chemical reactions on small volumes of 500 μl or less.
12. A system for performing microwave-assisted chemical reactions on small volumes, comprising a micro vial assembly (10,20,30,40) according to any previous claim 1-11.
13. The system of claim 12, wherein the outer perimeter of the sleeve (20) is dimensioned for bridging the radial distance between a wall of the vessel (10) and an entrance diameter (D) of a microwave cavity (1) in the system.
14. The use of a micro vial assembly according to any of claims 1-11 for performing microwave-assisted chemical reactions, in particular microwave-assisted organic synthesis reactions.
15. The use of a system according to any of claims 12-13 for performing microwave-assisted chemical reactions, in particular microwave-assisted organic synthesis reactions.

10/539045
PCT/SE2003/001996

WO 2004/054706

1/3

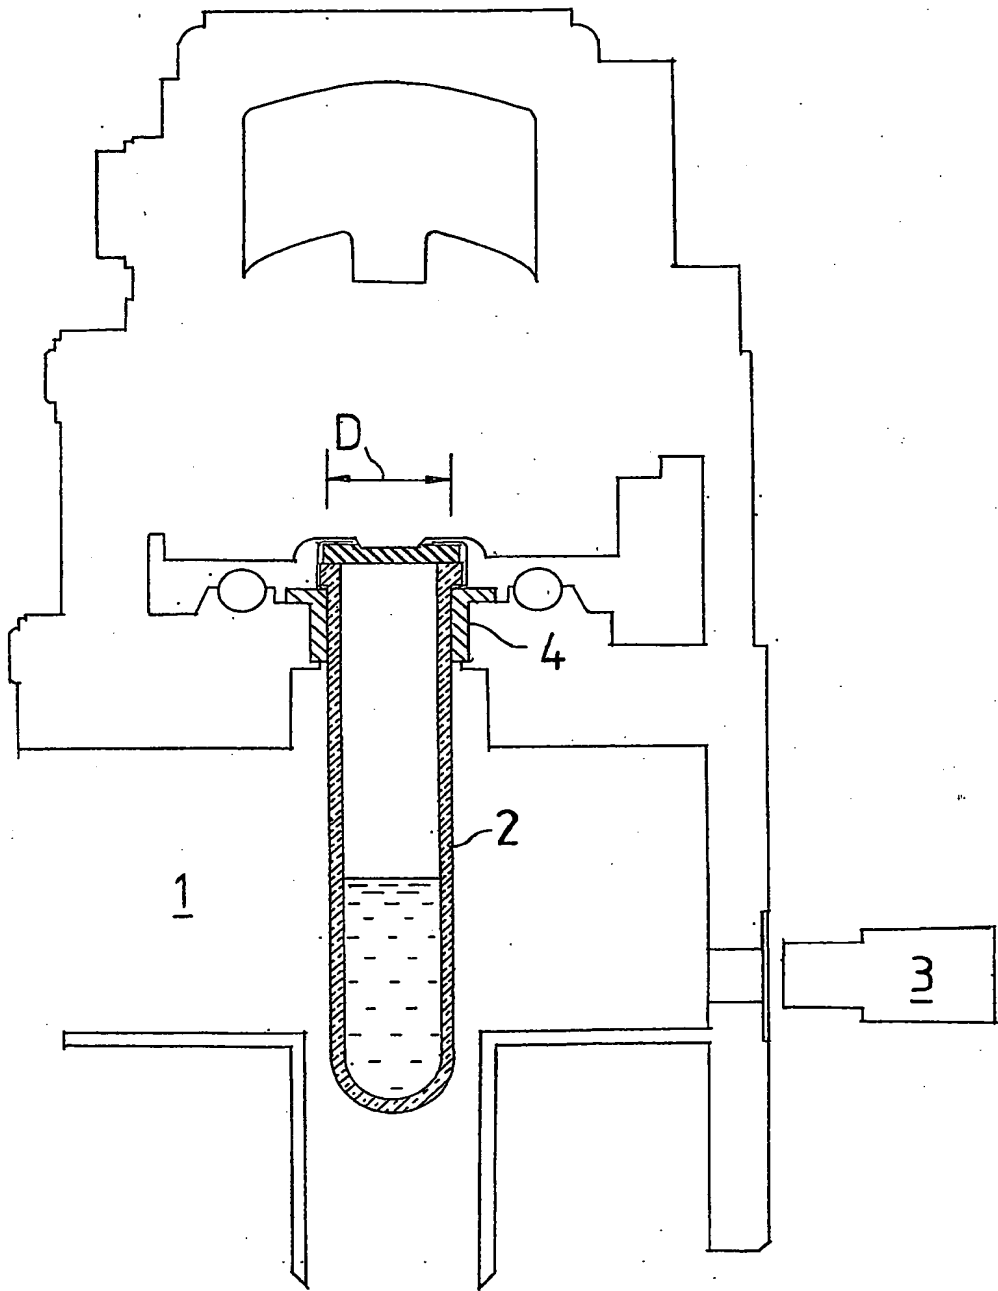


Fig.1 (Prior art vessel)

10/539045

PCT/SE2003/001996

WO 2004/054706

2/3

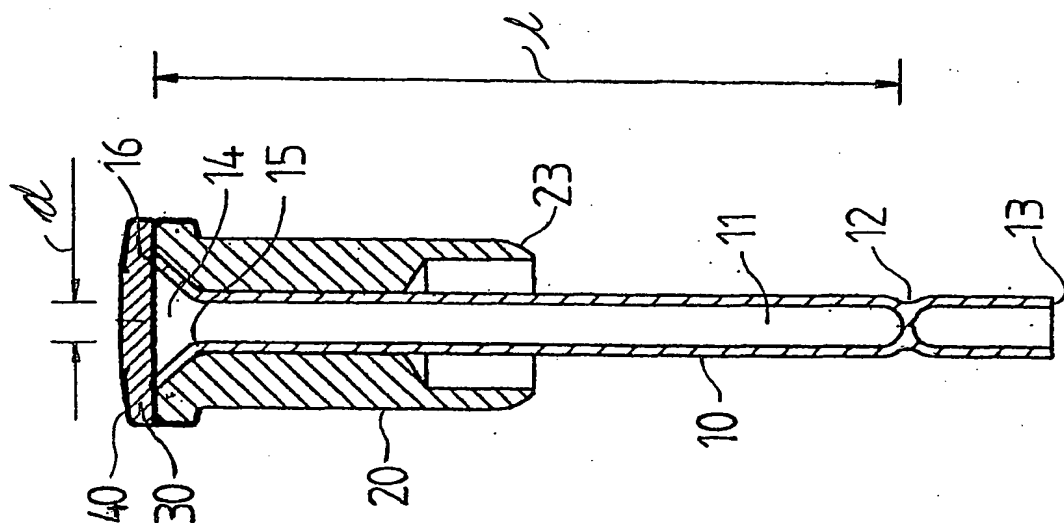


Fig. 3

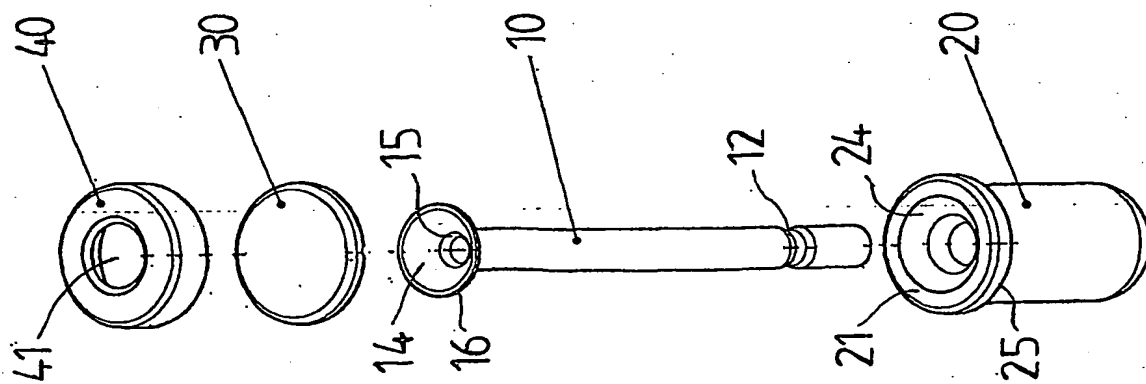


Fig. 2

10/539045

WO 2004/054706

PCT/SE2003/001996

3/3

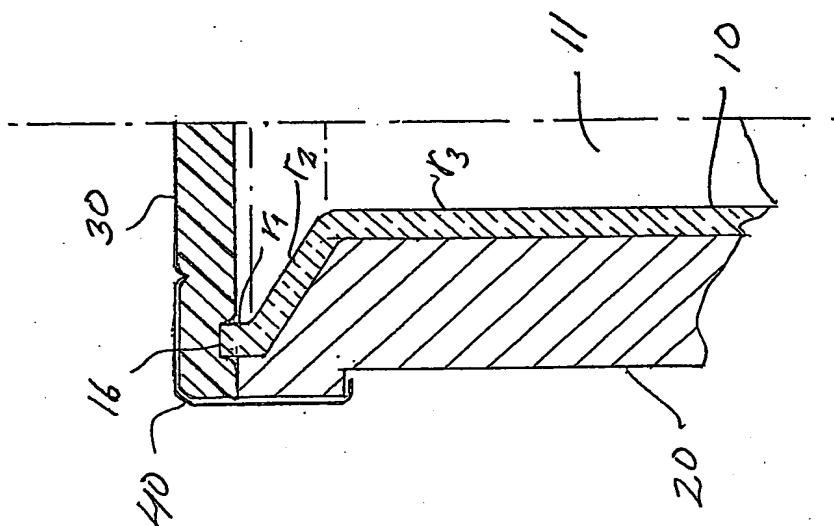


Fig. 5

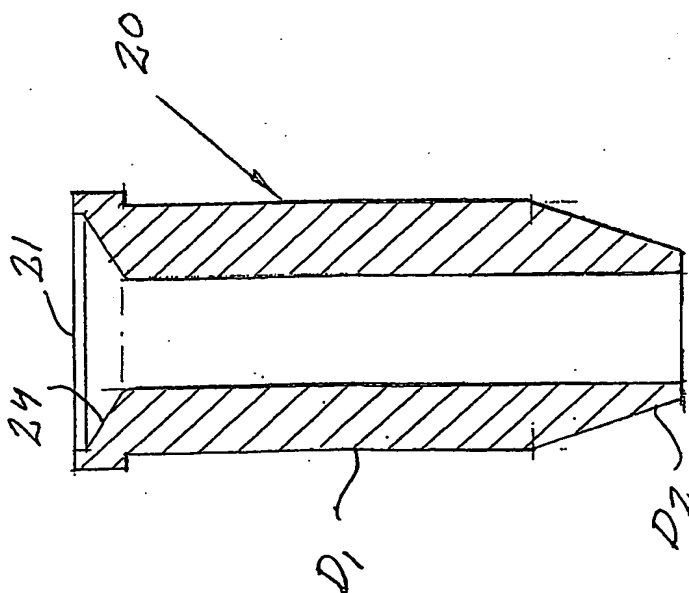


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/SE 03/01996

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B01J19/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B01J H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 02 052279 A (ULIN JOHAN ; PERSONAL CHEMISTRY I UPPSALA A (SE)) 4 July 2002 (2002-07-04) abstract page 6 -page 7; figures 3-5	1-15
Y	DE 196 12 265 A (INFOCHROMA AG ; GLASTECHNIK GRAEFENRODA GMBH (DE)) 14 November 1996 (1996-11-14) abstract column 1, line 1 - line 36 column 2, line 43 - line 68 column 3, line 10 - line 45; figure 1	1-15
Y	JP 61 033657 A (SHIBATA HARIO GLASS KK) 17 February 1986 (1986-02-17) the whole document	1-15
	-/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *8* document member of the same patent family

Date of the actual completion of the international search

15 March 2004

Date of mailing of the international search report

31/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Thomasson, P

INTERNATIONAL SEARCH REPORT

Internal	Application No
PCT/SE 03/01996	

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 197 44 940 A (UMEX GES FUER UMWELTBERATUNG U) 3 September 1998 (1998-09-03) abstract column 2, line 21 - line 23 column 3, line 25 - line 34; figure 5	1-15
A	WO 02 089974 A (JENNINGS WILLIAM EDWARD ;THOMAS JAMES EDWARD (US); CEM CORP (US);) 14 November 2002 (2002-11-14) abstract page 17, line 8 -page 18, line 2; figure 11 page 18, line 3 - line 20; figure 12	1-15
A	US 5 264 185 A (FLOYD TERRY S) 23 November 1993 (1993-11-23) the whole document	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/SE 03/01996

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 02052279	A	04-07-2002	CA 2431703 A1	04-07-2002
			EE 200300292 A	15-10-2003
			EP 1344067 A2	17-09-2003
			NO 20032857 A	22-08-2003
			WO 02052279 A2	04-07-2002
			US 2002090736 A1	11-07-2002
DE 19612265	A	14-11-1996	DE 19612265 A1	14-11-1996
JP 61033657	A	17-02-1986	JP 1017373 B	30-03-1989
			JP 1535835 C	21-12-1989
DE 19744940	A	03-09-1998	DE 19744940 A1	03-09-1998
			WO 9837962 A1	03-09-1998
WO 02089974	A	14-11-2002	US 2003170149 A1	11-09-2003
			CA 2435138 A1	14-11-2002
			EP 1358007 A1	05-11-2003
			WO 02089974 A1	14-11-2002
US 5264185	A	23-11-1993	US 4904450 A	27-02-1990
			US 5204065 A	20-04-1993
			EP 0385759 A2	05-09-1990

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.